

SPRING LOADED UNITS

ALWAYS spring loaded units are used in applications such as:-

Guillotines; Presses;
Moulding Machines; Tool Bases;
Press Brakes; Shock Loading applications.

Spring loaded ball units reduce damage caused by shock loads. They also allow for dimension changes due to temperature and self-adjust to evenly distribute loads.

1507, 1508 and 1509 Units

These units incorporate a plastic scraper seal, which keeps debris outside the ball unit.

Spring loaded ball unit sizes Ø31.7mm, Ø39.7mm and Ø50.8mm have dirt exit holes as standard. All other spring loaded ball units have felt or foam seals as standard.

Spring loaded ball units can be used as die-lifters, inverted or at an angle.

See pages 24 and 25 for details of our Hevi-Load spring loaded ball units and Die-Lifter ball units.

Completely stainless steel (Type15) spring loaded ball units also available upon request with reduced support loads and depress loads.

Spring loaded ball units with ball sizes of Ø25.4mm also available upon request with nylon load ball and stainless bearings (Type 14).

The Type 14 ball units are suitable for light load applications and when object surface protection is required.


The 1507 and 1509 ball units have 2mm thick pressed steel flanges.

Do not remove the circlip on any of the spring loaded ball units.


* Other loads available upon request.

LARGE TOP FLANGE

Features: Large top flange fixing. Low profile. The 1507 has a pressed steel flange 2mm thick similar to Small Top Flange image below.

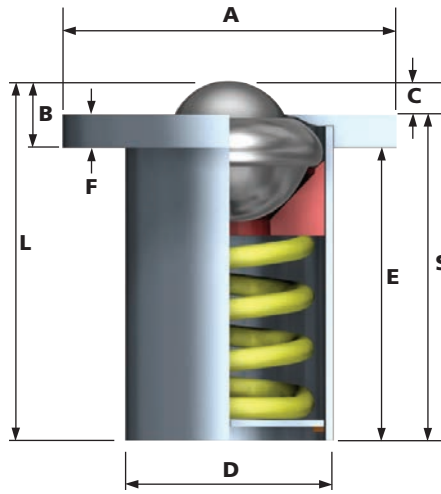


(1018 shown here)

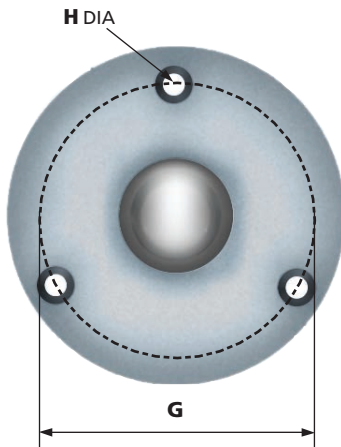


LARGE BOTTOM FLANGE

Features: Large bottom flange fixing. High profile.

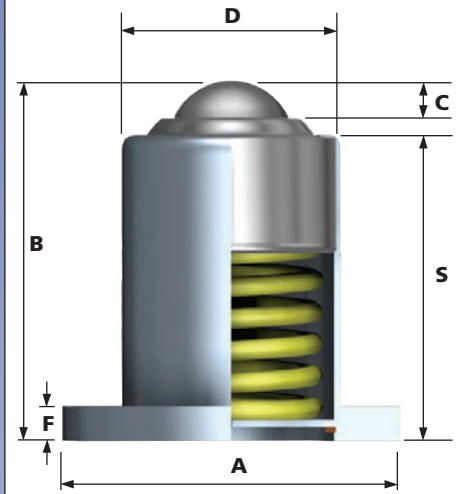

(1032 shown here)

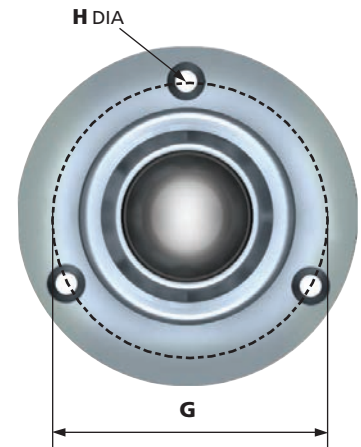


5320 / 5330 / 5345

The 5320 / 5330 / 5345 ball units are assembled with standard 522-0 or 530-0 or 545-0 Euro ball unit (see pages 16-17). The ball units have a dirt exit hole.



PLAIN BODY


Features: Plain body. Low profile.

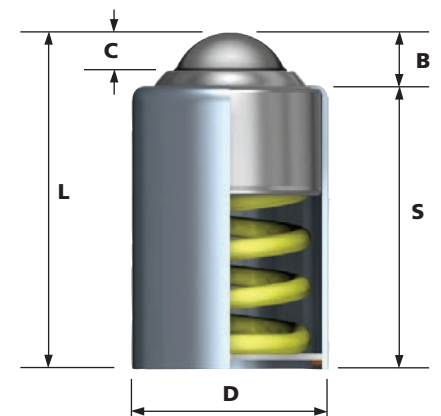

(1508 shown here)

SMALL TOP FLANGE

Features: Small flange. Low profile.

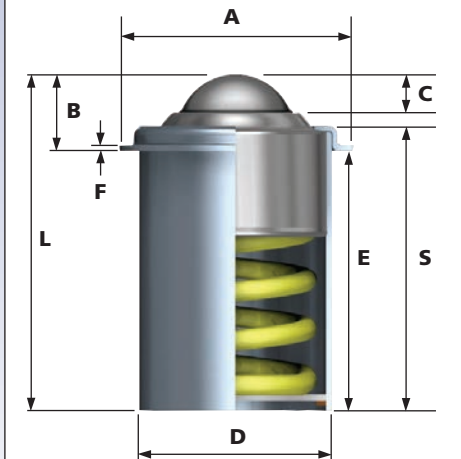

(1509 shown here)

REF No.	BALL SIZE (mm)	WEIGHT (KGS)	DIMENSIONS (mm)									
			A	B	C	D	E	F	G	H	L	S

SUPPORT DYNAMIC LOAD (kg)	LOAD TO FULLY DEPRESS (kg)
TYPE 13 Carbon Steel Bearings, Zinc Plated Pressings	
TYPE 16 Stainless Steel Bearings, Zinc Plated Pressings	

LARGE TOP FLANGE

3011	19	0.42	66.6 +0.0 -1.0	11.4	3.5	36.5	51.6	7.9	50.8 ±0.2	3x 7	63	59.5
1018	25.4	0.57	75 +0.0 -1.0	13.8	5.9	44.5	53.3	7.9	60.3 ±0.2	3x 7	67.1	61.2
1507	25.4	0.40	71.3	19.3	6.7	44.5	52.9	2	60.4 ±0.2	2x 5.1	72.2	61.3
1028	31.7	1.16	89 +0.0 -1.0	17	7.5	60.0	77.5	9.5	73 ±0.2	3x 7	94.5	87
2010	39.7	2.04	101.6 +0.0 -1.0	17.7	8.2	69.8	90		85.7 ±0.2	3x 9	107.7	99.5
4008	50.8	5.1	152.4 +0.0 -1.0	25.7	13.0	101.6	114	12.7	127 ±0.2		139.7	126.7

10	30
35	100
50	130
100	180
	170
170	410

LARGE BOTTOM FLANGE

3012	19	0.42	66.6 +0.0 -1.0	65.1	4.7	36.5	-	7.9	50.8 ±0.2	3x 7	-	55.6
1510	25.4	0.45	75 +0.0 -1.0	72.9	6.7	44.5	-	7.9	60.3 ±0.2	3x 7	-	47
1032	31.7	1.02	89 +0.0 -1.0	95.3	7.7	60.0	-	9.5	73 ±0.2	3x 7	-	84.9

10	35
50	130
100	200

5320 / 5330 / 5345

5320	22.2	0.26	50	18.5 ±0.2	4	39	33	14	-	-	51.5	47
5330	30	0.52	62	24.4	6.6	48.2	45.6	17.7	-	-	70	63.3
5345	44.45	1.40	85	35.6	11.4	66.4	64.9	24.2	-	-	100.5	89.1

72	160*
141	201
232	420

* Other loads available upon request.

PLAIN BODY

3009	19	0.26	-	9.5	4.7	36.5					65.1	55.6
1016	25.4	0.38	-	11.9	6.3	44.5					70.6	58.7
1508	25.4	0.38	-	12.5	6.7	44.5					72.9	60.4
1026	31.7	0.86	-	10.4	7.7	60.0					94.5	87
2008	39.7	1.46	-	12.7	9.1	69.8					107.6	94.9
4006	50.8	4.2	-	13	13	101.6					139.7	126.7

10	35
35	140
50	130
100	200
	190
170	410

SMALL TOP FLANGE

3010	19	0.30	45 +0.0 -1.0	11.4	3.5	36.5	51.6	7.9			63	59.5
1017	25.4	0.44	50 +0.0 -1.0	13.8	5.9	44.5	53.3				67.1	61.2
1509	25.4	0.39	56	19.3	6.7	44.5	52.9	2			72.2	61.3
1027	31.7	0.99	75 +0.0 -1.0	17	7.5	60.0	77.5	9.5			94.6	87.1
2009	39.7	1.8		17.7	8.2	69.8	90		107.7	99.5		
4007	50.8	4.4	114.3 +0.0 -1.0	25.7	13	101.6	114	12.7			139.7	126.7

10	30
35	100
50	130
100	180
	170
170	410

General Spring Rating Tolerance ±10%
General Tolerance unless stated ±0.3mm