


SRS



Caged Ball LM Guide Miniature Type Model SRS

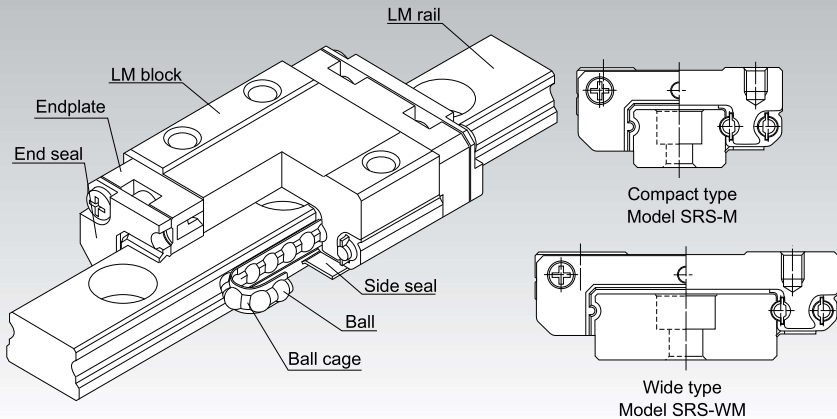

*For the ball cage, see **A1-88**.

Point of Selection	A1-10
Point of Design	A1-436
Options	A1-459
Model No.	A1-523
Precautions on Use	A1-529
Accessories for Lubrication	A24-1
Mounting Procedure and Maintenance	B1-89

Equivalent moment factor	A1-43
Rated Loads in All Directions	A1-58
Equivalent factor in each direction	A1-60
Radial Clearance	A1-70
Accuracy Standards	A1-82
Shoulder Height of the Mounting Base and the Corner Radius	A1-451
Permissible Error of the Mounting Surface	A1-453
Flatness of the Mounting Surface	A1-454
Dimensions of Each Model with an Option Attached	A1-472

Structure and Features

Caged Ball LM Guide model SRS has a structure where two raceways are incorporated into the compact body, enabling the model to receive loads in all directions, and to be used in locations where a moment is applied with a single rail. In addition, use of ball cages eliminates friction between balls, thus achieving high speed, low noise, acceptable running sound, long service life, and long-term maintenance-free operation.

[Low Dust Generation]

Use of ball cages eliminates friction between balls and retains lubricant, thus achieving low dust generation. In addition, the LM block and LM rail use stainless steel, which is highly resistant to corrosion.

[Compact]

Since SRS has a compact structure where the rail cross section is designed to be low and that contains only two rows of balls, it can be installed in space-saving locations.

[Lightweight]


Since part of the LM block (e.g., around the ball relief hole) is made of resin and formed through insert molding, SRS is a lightweight, low inertia type of LM Guide.

Types and Features

Model SRS5M

SRS5 is the smallest caged ball LM guide.


Specification Table⇒**A1-152**

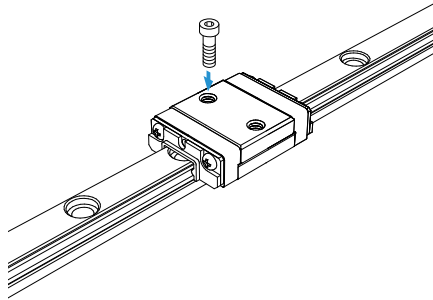

Model SRS-5N

Overall LM block length (L) is greater than for model SRS5M; load rating and permissible moment are higher as well.


Specification Table⇒**A1-152**

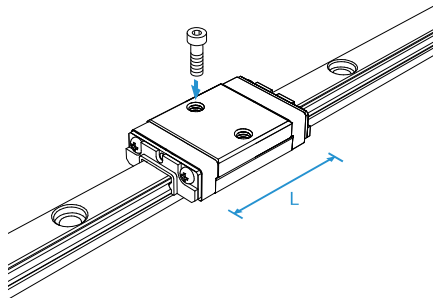

Model SRS5WM

This model has a larger overall LM block length (L), width (W), rated load and permissible moment than model SRS5M.


Specification Table⇒**A1-156**

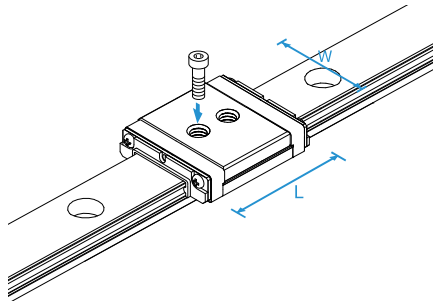

Model SRS-5WN

Overall LM block length (L) is greater than for model SRS5WM; load rating and permissible moment are higher as well.


Specification Table⇒**A1-156**

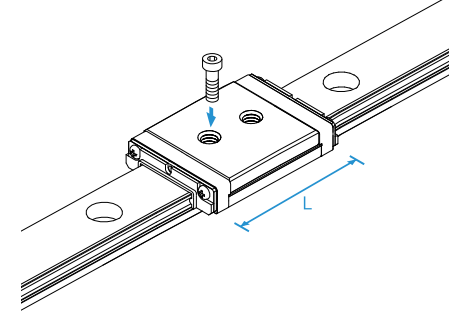

Model SRS-S

Overall LM block length (L) is less than that of model SRS-M.


Specification Table⇒**A1-152**

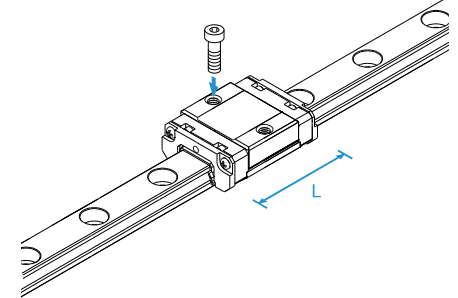

Model SRS-WS

Has a longer overall LM block length (L), a greater width and a larger rated load and permissible moment than SRS-S.


Specification Table⇒**A1-156**

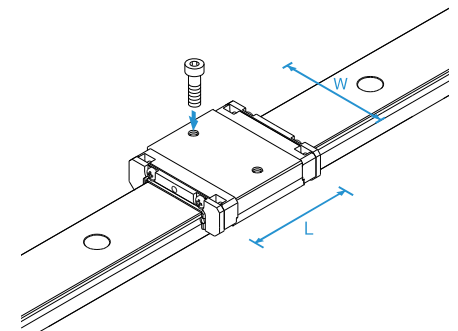

Model SRS-M

A standard type of SRS.


Specification Table⇒**A1-152**

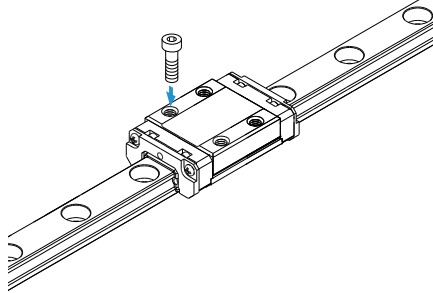

Model SRS-WM

Has a longer overall LM block length (L), a greater width and a larger rated load and permissible moment than SRS-M.


Specification Table⇒**A1-156**

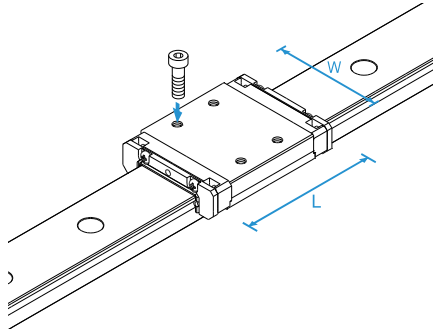

Model SRS-N

Compared with model SRS-M, it has a longer total LM block length (L) and a higher load rating and permissible moment.


Specification Table⇒**A1-152**

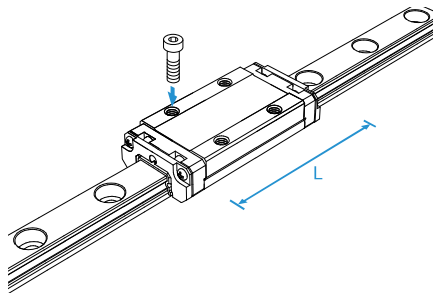

Model SRS-WN

Compared with Model SRS-WM, it has a longer total LM block length (L) and a higher load rating and permissible moment.

Specification Table⇒**A1-156**

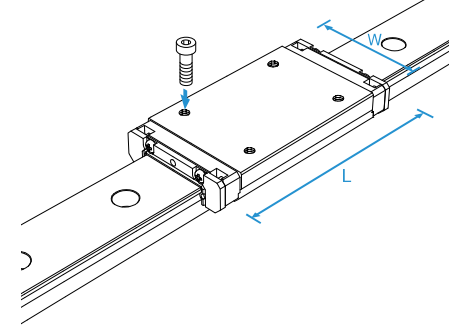

SRS-G

Specification Table⇒**A1-152 to A1-158**

The SRS-G, a model equipped with uncaged, full-complement bearings, is also available. Due to its cageless design, however, the SRS-G's dynamic load rating is lower than that of standard SRS models. For specific data, please refer to the dimension tables in this catalog.

Flatness of the LM Rail and the LM Block Mounting Surface

Since the Model SRS has Gothic-arch grooves, any precision errors in the mounting surface may negatively affect its operability. Therefore, we recommend using SRS on mounting surfaces made with high precision.

Table1 Flatness of the LM Rail and the LM Block Mounting Surface



Unit: mm

Model No.	Flatness error
SRS 5	0.015/200
SRS 7	0.025/200
SRS 9	0.035/200
SRS 12	0.050/200
SRS 15	0.060/200
SRS 20	0.070/200
SRS 25	0.070/200

Note 1) As many factors can affect the mounting precision, we recommend using values 70% or less than those shown.

Note 2) The above figures apply to normal clearances. When using two or more rails with C1 clearance, we recommend using values 50% or less than those shown.

Models SRS-S, SRS-M and SRS-N

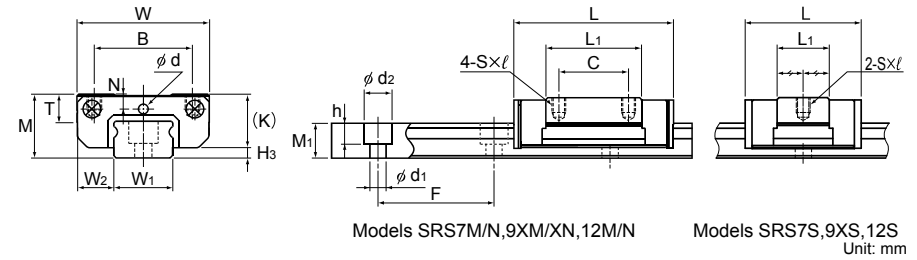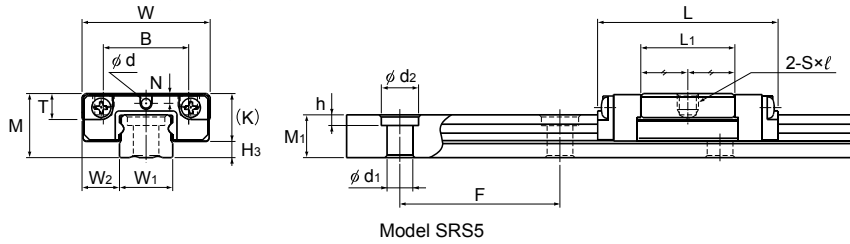

LM Guide

Model No.	Outer dimensions			LM block dimensions									LM rail dimensions					Basic load rating		Static permissible moment N-m*					Mass		
	Height	Width	Length	B	C	S×ℓ	L ₁	T	K	N	d	H ₃	Width	Height	Pitch	Length*	C	C ₀	M _A		M _B		M _C	LM block	LM rail		
	M	W	L										W ₁	W ₂	M ₁	F	d ₁ ×d ₂ ×h	Max	kN	kN	1 block	Double blocks	1 block	Double blocks	1 block	kg	kg/m
SRS 5M SRS 5GM	6	12	16.9	8	—	M2×1.5	8.8	1.7	4.5	0.93	0.8	1.5	5 ⁰ _{-0.02}	3.5	4	15	2.4×3.5×1	220	0.439 0.366	0.468 0.527	0.74 0.79	5.11 5.76	0.86 0.94	5.99 6.91	1.21 1.37	0.002	0.13
SRS 5N SRS 5GN	6	12	20.1	8	—	M2×1.5	12	1.7	4.5	0.93	0.8	1.5	5 ⁰ _{-0.02}	3.5	4	15	2.4×3.5×1	220	0.515 0.448	0.586 0.703	1.12 1.34	7.45 8.82	1.31 1.57	8.73 10.3	1.52 1.83	0.003	0.13
SRS 7S SRS 7GS	8	17	19	12	—	M2×2.3	9	3.3	6.7	1.6	1.2	1.3	7 ⁰ _{-0.02}	5	4.7	15	2.4×4.2×2.3	480	1.09 0.946	0.964 1.16	1.60 1.96	12.6 14.7	1.83 2.25	14.5 16.9	3.73 4.49	0.005	0.25
SRS 7M SRS 7GM	8	17	23.4	12	8	M2×2.3	13.4	3.3	6.7	1.6	1.2	1.3	7 ⁰ _{-0.02}	5	4.7	15	2.4×4.2×2.3	480	1.51 1.16	1.29 1.54	3.09 3.61	17.2 25.5	3.69 4.14	17.3 29.4	5.02 6.57	0.009	0.25
SRS 7N SRS 7GN	8	17	31	12	13	M2×2.3	21	3.3	6.7	1.6	1.2	1.3	7 ⁰ _{-0.02}	5	4.7	15	2.4×4.2×2.3	480	2.01 1.63	2.31 2.51	7.77 8.08	43.2 46.9	8.96 9.32	50.0 54.2	8.96 9.72	0.012	0.25
SRS 9XS SRS 9XGS	10	20	21.5	15	—	M3×2.8	10.5	4.5	8.5	2.4	1.6	1.5	9 ⁰ _{-0.02}	5.5	5.5	20	3.5×6×3.3	1240	1.78 1.37	1.53 1.53	3.15 2.85	22.2 22.6	3.61 3.27	25.6 26	7.04 7.04	0.009	0.36
SRS 9XM SRS 9XGM	10	20	30.8	15	10	M3×2.8	19.8	4.5	8.5	2.4	1.6	1.5	9 ⁰ _{-0.02}	5.5	5.5	20	3.5×6×3.3	1240	2.69 2.22	2.75 3.06	9.31 9.87	52.2 57.9	10.7 11.4	60.3 66.9	12.7 14.1	0.016	0.36
SRS 9XN SRS 9XGN	10	20	40.8	15	16	M3×2.8	29.8	4.5	8.5	2.4	1.6	1.5	9 ⁰ _{-0.02}	5.5	5.5	20	3.5×6×3.3	1240	3.48 2.94	3.98 4.59	18.7 21.1	96.5 111	21.6 24.4	112 128	18.3 21.1	0.024	0.36
SRS 12S SRS 12GS	13	27	25	20	—	M3×3.2	11.2	5.7	11	3	2	2	12 ⁰ _{-0.02}	7.5	7.5	25	3.5×6×4.5	2000	2.70 2.07	2.10 2.10	4.62 4.17	37.5 38.1	4.62 4.62	37.5 38.1	13.8 13.8	0.017	0.65
SRS 12M SRS 12GM	13	27	34.4	20	15	M3×3.2	20.6	5.7	11	3	2	2	12 ⁰ _{-0.02}	7.5	7.5	25	3.5×6×4.5	2000	4.00 3.36	3.53 3.55	12.0 12.1	78.5 79.0	12.0 12.1	78.5 79.0	23.1 23.2	0.027	0.65
SRS 12N SRS 12GN	13	27	47.1	20	20	M3×3.2	33.3	5.7	11	3	2	2	12 ⁰ _{-0.02}	7.5	7.5	25	3.5×6×4.5	2000	5.82 4.72	5.30 6.83	28.4 34.8	151 195	28.4 34.8	151 195	34.7 44.7	0.049	0.65

Note) Since stainless steel is used in the LM block, LM rail and balls, these models are highly resistant to corrosion and environment. The SRS-G is equipped with uncaged, full-complement bearings. Using a greasing hole other than for greasing may cause damage.

Note1) The maximum length under "Length*" indicates the standard maximum length of an LM rail. (See **■1-160**.)

Static permissible moment* 1 block: the static permissible moment with one LM block
Double blocks: static permissible moment when two LM blocks are in close contact with each other
Total block length L : The total block length L shown in the table is the length with the dust proof parts, code UU or SS.
If other contamination protection accessories or lubricant equipment are installed, the total block length will increase.
(See **■1-472** or **■1-492**)


For the SRS5M and SRS5N LM guide, the balls will fall out of the block if it is removed from the rail.
To secure the LM rail of model SRS5M, use cross-recessed head screws for precision equipment (No. 0 pan head screw, class 1) M2.
Note2) The basic load rating in the dimension table is for a load in the radial direction. Use Table7 on **■1-58** to calculate the load rating for loads in the reverse radial direction or lateral direction.

● Reference bolt tightening torque when mounting an LM block for model SRS 5 and 7 are shown in the table below.
Reference tightening torque

Model No.	Model No. of screw	Screw depth (mm)	Reference tightening torque(N-m)*
SRS 5	M2	1.5	0.4
SRS 7	M2	2.3	0.4


*Tightening above the tightening torque affects accuracy.
Be sure to tighten at or below the defined tightening torque.

Model number coding

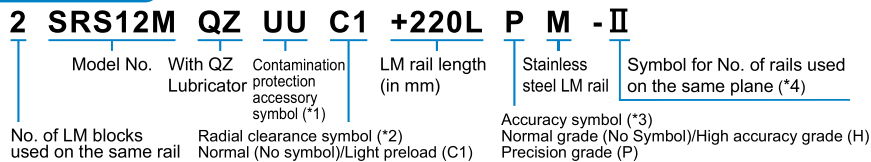


Note) This model number indicates that a single-rail unit constitutes one set. (i.e., required number of sets when 2 rails are used in parallel is 2 at a minimum.) Those models equipped with QZ Lubricator cannot have a grease nipple. When desiring a grease nipple for a model attached with QZ, contact THK.


Models SRS-S, SRS-M and SRS-N




Model SRS15S

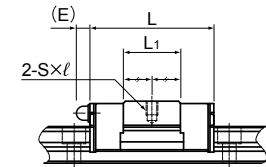

Model SRS15GS

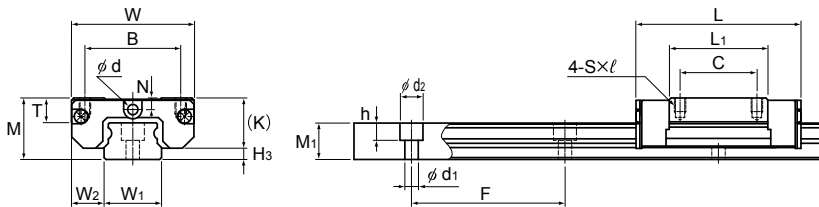

Models SRS15M/N, 20M, 25M

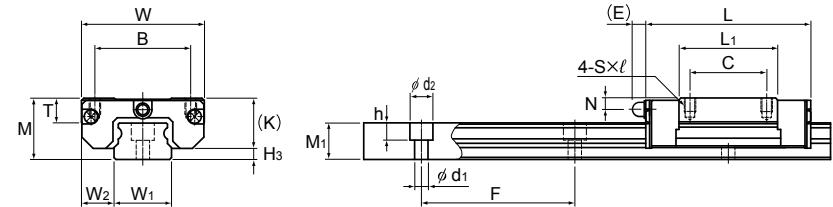

Models SRS15GM/GN, 20GM, 25GM

Unit: mm

Model No.	Outer dimensions			LM block dimensions										LM rail dimensions					Basic load rating		Static permissible moment N-m*					Mass			
	Height	Width	Length	B	C	S×ℓ	L ₁	T	K	N	E	Greasing hole	Grease nipple	H ₃	Width	Height	Pitch	Length*	C	C ₀	M _A		M _B		M _C	LM block	LM rail		
	M	W	L									d			W ₁	W ₂	M ₁	F	d ₁ ×d ₂ ×h	Max	kN	kN	1 block	Double blocks	1 block	Double blocks	1 block	kg	kg/m
SRS 15S SRS 15GS	16	32	32	25	—	M3×3.5	14.7	6.5	13.3	3	—	3	—	2.7	15 ⁰ _{-0.02}	8.5	9.5	40	3.5×6×4.5	2000	4.50 4.01	3.39 4.24	9.54 12.6	77.5 92.7	9.54 12.6	77.5 92.7	24.1 30.1	0.033	0.96
SRS 15M SRS 15GM	16	32	43	25	20	M3×3.5	25.7	6.5	13.3	3	—	3	—	2.7	15 ⁰ _{-0.02}	8.5	9.5	40	3.5×6×4.5	2000	6.66 5.59	5.7 5.72	26.2 24.8	154 158	26.2 24.8	154 158	40.4 40.6	0.047	0.96
SRS 15N SRS 15GN	16	32	60.8	25	25	M3×3.5	43.5	6.5	13.3	3	—	3	—	2.7	15 ⁰ _{-0.02}	8.5	9.5	40	3.5×6×4.5	2000	9.71 8.27	8.55 11.9	59.7 82.3	312 433	59.7 82.3	312 433	60.7 84.5	0.095	0.96
SRS 20M SRS 20GM	20	40	50	30	25	M4×6	34	9	16.6	4	—	3	—	3.4	20 ⁰ _{-0.03}	10	11	60	6×9.5×8	1800	7.75 5.95	9.77 9.4	54.3 44.7	296 242	62.4 53.3	341 289	104 91.4	0.11	1.68
SRS 25M SRS 25GM	25	48	77	35	35	M6×7	56	11	20	5	—	4	—	5	23 ⁰ _{-0.03}	12.5	15	60	7×11×9	1800	16.5 13.3	20.2 22.3	177 181	932 962	177 181	932 962	248 255	0.24	2.6

Note) Since stainless steel is used in the LM block, LM rail and balls, these models are highly resistant to corrosion and environment. The SRS-G is equipped with uncaged, full-complement bearings. For the SRS15S/M/N, 20M, and 25M, if a grease nipple is required, please specify upon ordering. Using a greasing hole other than for greasing may cause damage.

Note1) The maximum length under "Length*" indicates the standard maximum length of an LM rail. (See **■1-160**.)

Static permissible moment* 1 block: the static permissible moment with one LM block

Double blocks: static permissible moment when two LM blocks are in close contact with each other
Total block length L : The total block length L shown in the table is the length with the dust proof parts, code UU or SS. If other contamination protection accessories or lubricant equipment are installed, the total block length will increase. (See **■1-472** or **■1-492**.)

Note2) The basic load rating in the dimension table is for a load in the radial direction. Use Table7 on **■1-58** to calculate the load rating for loads in the reverse radial direction or lateral direction.

Model number coding



2 SRS20M QZ UU C1 +220L P M -II

Model No. With QZ Lubricator Contamination protection accessory symbol (*1) LM rail length (in mm) Stainless steel LM rail Symbol for No. of rails used on the same plane (*4)
No. of LM blocks used on the same rail Radial clearance symbol (*2) Normal (No symbol)/Light preload (C1) Accuracy symbol (*3) Normal grade (No Symbol)/High accuracy grade (H) Precision grade (P)

(*1) See contamination protection accessory on **■1-496**. (*2) See **■1-70**. (*3) See **■1-82**. (*4) See **■1-13**.

Note) This model number indicates that a single-rail unit constitutes one set. (i.e., required number of sets when 2 rails are used in parallel is 2 at a minimum.) Those models equipped with QZ Lubricator cannot have a grease nipple. When desiring a grease nipple for a model attached with QZ, contact THK.

Models SRS-WS, SRS-WM and SRS-WN

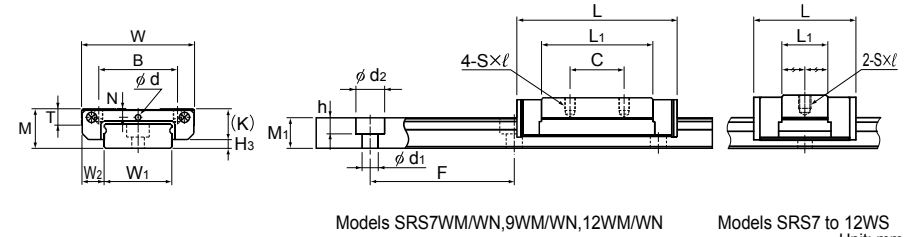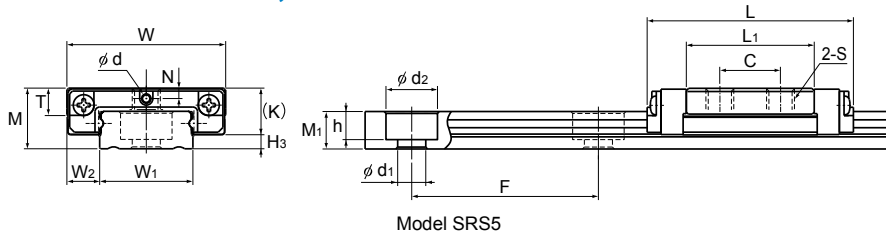

Model No.	Outer dimensions			LM block dimensions									LM rail dimensions						Basic load rating		Static permissible moment N-m*					Mass		
	Height	Width	Length	B	C	S × ℓ	L ₁	T	K	N	d	H ₃	Width	Height	Pitch	Length*	C	C ₀	M _A		M _B		M _C	LM block	LM rail			
	M	W	L										W ₁	W ₂	W ₃	M ₁	F	d ₁ × d ₂ × h	Max	kN	kN	1 block	Double blocks	1 block	Double blocks	1 block	kg	kg/m
SRS 5WM SRS 5WGM	6.5	17	22.1	—	6.5	M3 through	13.7	2.7	5	1.1	0.8	1.5	10 ⁰ -0.02	3.5	—	4	20	3 × 5.5 × 3	220	0.584 0.498	0.703 0.82	1.57 1.79	9.59 11.1	1.83 2.15	11.24 13.3	3.58 4.18	0.005	0.27
SRS 5WN SRS 5WGN	6.5	17	28.1	—	11	M3 through	19.7	2.7	5	1.1	0.8	1.5	10 ⁰ -0.02	3.5	—	4	20	3 × 5.5 × 3	220	0.746 0.64	0.996 1.17	3.01 3.54	16.8 19.6	3.53 4.15	19.7 23	5.08 5.97	0.007	0.27
SRS 7WS SRS 7WGS	9	25	22.5	19	—	M3 × 2.8	11.9	3.8	7.2	1.8	1.2	1.8	14 ⁰ -0.02	5.5	—	5.2	30	3.5 × 6 × 3.2	480	1.38 1.06	1.35 1.35	2.89 2.58	19.6 20.0	3.32 2.96	22.7 23.1	9.95 9.95	0.011	0.56
SRS 7WM SRS 7WGM	9	25	31	19	10	M3 × 2.8	20.4	3.8	7.2	1.8	1.2	1.8	14 ⁰ -0.02	5.5	—	5.2	30	3.5 × 6 × 3.2	480	2.01 1.63	1.94 2.51	6.47 8.87	36.4 51.5	7.71 10.2	42.3 59.5	14.33 20.3	0.018	0.56
SRS 7WN SRS 7WGN	9	25	40.9	19	17	M3 × 2.8	30.3	3.8	7.2	1.8	1.2	1.8	14 ⁰ -0.02	5.5	—	5.2	30	3.5 × 6 × 3.2	480	2.56 2.12	3.28 3.66	15.0 16.6	78.9 87.7	17.4 19.2	91.2 101	24.2 27	0.026	0.56
SRS 9WS SRS 9WGS	12	30	26.5	21	—	M3 × 2.8	14.5	4.9	9.1	2.3	1.6	2.9	18 ⁰ -0.02	6	—	7.5	30	3.5 × 6 × 4.5	1430	2.03 1.73	1.84 2.14	4.49 5.15	32.1 36.9	5.15 5.92	38.9 42.6	17.4 20.2	0.018	1.01
SRS 9WM SRS 9WGM	12	30	39	21	12	M3 × 2.8	27	4.9	9.1	2.3	1.6	2.9	18 ⁰ -0.02	6	—	7.5	30	3.5 × 6 × 4.5	1430	3.29 2.67	3.34 3.35	14.0 13.9	78.6 69.7	16.2 16.6	91.0 96.7	31.5 31.7	0.031	1.01
SRS 9WN SRS 9WGN	12	30	50.7	23	24	M3 × 2.8	38.7	4.9	9.1	2.3	1.6	2.9	18 ⁰ -0.02	6	—	7.5	30	3.5 × 6 × 4.5	1430	4.20 3.48	4.37 5.81	25.1 33.2	130 172	29.1 40	151 208	41.3 54.9	0.049	1.01
SRS 12WS SRS 12WGS	14	40	30.5	28	—	M3 × 3.5	16.9	5.7	11	3	2	3	24 ⁰ -0.02	8	—	8.5	40	4.5 × 8 × 4.5	2000	3.58 3.05	3.15 3.68	9.77 11.1	63 72.6	9.77 11.1	63 72.6	39.5 46.2	0.034	1.52
SRS 12WM SRS 12WGM	14	40	44.5	28	15	M3 × 3.5	30.9	5.7	11	3	2	3	24 ⁰ -0.02	8	—	8.5	40	4.5 × 8 × 4.5	2000	5.48 4.46	5.3 5.32	26.4 25.7	143 146	26.4 25.7	143 146	66.5 66.8	0.055	1.52
SRS 12WN SRS 12WGN	14	40	59.5	28	28	M3 × 3.5	45.9	5.7	11	3	2	3	24 ⁰ -0.02	8	—	8.5	40	4.5 × 8 × 4.5	2000	7.13 5.93	7.07 9.46	49.2 64.7	249 332	49.2 64.7	249 332	88.7 119	0.091	1.52

Note) Since stainless steel is used in the LM block, LM rail and balls, these models are highly resistant to corrosion and environment. The SRS-G is equipped with uncaged, full-complement bearings. Using a greasing hole other than for greasing may cause damage.

Note1) The maximum length under "Length * " indicates the standard maximum length of an LM rail. (See **A1-160**.)
 Static permissible moment * 1 block: the static permissible moment with one LM block
 Double blocks: static permissible moment when two LM blocks are in close contact with each other
 Total block length L : The total block length L shown in the table is the length with the dust proof parts, code UU or SS. If other contamination protection accessories or lubricant equipment are installed, the total block length will increase. (See **A1-472** or **A1-492**.)


Note2) The basic load rating in the dimension table is for a load in the radial direction. Use Table7 on **A1-58** to calculate the load rating for loads in the reverse radial direction or lateral direction.

- Reference bolt tightening torque when mounting an LM block for Model SRS 5 and 7W are shown in the table below.

Model No.	Model No. of screw	Screw depth (mm)	Reference tightening torque(N-m)*
SRS 5W	M3	2.3	0.4
SRS 7W	M3	2.8	0.4

*Tightening above the tightening torque affects accuracy. Be sure to tighten at or below the defined tightening torque.





Model number coding

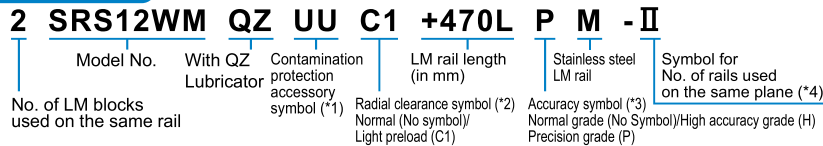

(*1) See contamination protection accessory on **A1-496**. (*2) See **A1-70**. (*3) See **A1-82**. (*4) See **A1-13**.

Note) This model number indicates that a single-rail unit constitutes one set. (i.e., required number of sets when 2 rails are used in parallel is 2 at a minimum.) Those models equipped with QZ Lubricator cannot have a grease nipple. When desiring a grease nipple for a model attached with QZ, contact THK.

Models SRS-WS, SRS-WM and SRS-WN

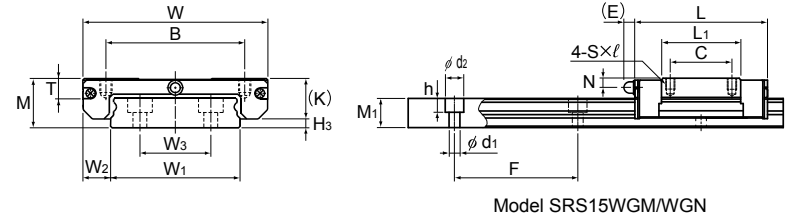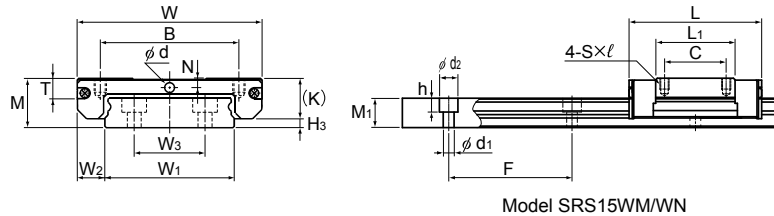

LM Guide


Unit: mm

Model No.	Outer dimensions			LM block dimensions										LM rail dimensions						Basic load rating		Static permissible moment N-m*					Mass			
	Height	Width	Length	B	C	S × l	L ₁	T	K	N	E	Greasing hole d	Grease nipple	H ₃	Width			Height	Pitch		Length*	C	C ₀	M _A		M _B		M _C	LM block	LM rail
	M	W	L												W ₁	W ₂	W ₃	M ₁	F	d ₁ × d ₂ × h	Max	kN	kN	1 block	Double blocks	1 block	Double blocks	1 block	kg	kg/m
SRS 15WS SRS 15WGS	16	60	41.5	45	—	M4 × 4.5	24.9	6.5	13.3	3	—	3	—	2.7	42 ⁰ _{-0.02}	9	23	9.5	40	4.5 × 8 × 4.5	2000	6.64 5.59	5.94 6.78	25.4 29	158 178	25.4 29	158 178	123 140	0.087	2.87
SRS 15WM SRS 15WGM	16	60	55.5	45	20	M4 × 4.5	38.9	6.5	13.3	3	—	3	—	2.7	42 ⁰ _{-0.02}	9	23	9.5	40	4.5 × 8 × 4.5	2000	9.12 7.43	8.55 8.59	51.2 52.7	290 293	51.2 52.7	290 293	176 178	0.13	2.87
SRS 15WN SRS 15WGN	16	60	74.5	45	35	M4 × 4.5	57.9	6.5	13.3	3	—	3	—	2.7	42 ⁰ _{-0.02}	9	23	9.5	40	4.5 × 8 × 4.5	2000	12.4 9.87	12.1 15.3	106 133	532 671	106 133	532 671	250 317	0.201	2.87

Note) Since stainless steel is used in the LM block, LM rail and balls, these models are highly resistant to corrosion and environment. The SRS-G is equipped with uncaged, full-complement bearings. For the SRS15WS/WM/WN, if a grease nipple is required, please specify upon ordering. Using a greasing hole other than for greasing may cause damage.

Note) The maximum length under "Length * " indicates the standard maximum length of an LM rail. (See **A1-160**.)
 Static permissible moment* 1 block: the static permissible moment with one LM block
 Double blocks: static permissible moment when two LM blocks are in close contact with each other
 Total block length L : The total block length L shown in the table is the length with the dust proof parts, code UU or SS. If other contamination protection accessories or lubricant equipment are installed, the total block length will increase. (See **A1-472** or **A1-492**)

Model number coding

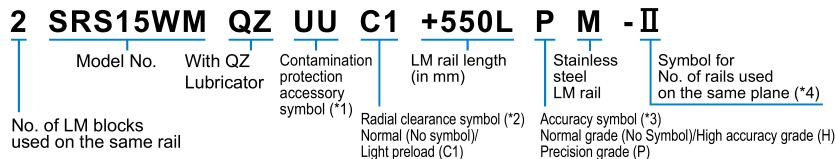

(*1) See contamination protection accessory on **A1-496**. (*2) See **A1-70**. (*3) See **A1-82**. (*4) See **A1-13**.

Note) This model number indicates that a single-rail unit constitutes one set. (i.e., required number of sets when 2 rails are used in parallel is 2 at a minimum.) Those models equipped with QZ Lubricator cannot have a grease nipple. When desiring a grease nipple for a model attached with QZ, contact THK.

Standard Length and Maximum Length of the LM Rail

Table2 shows the standard lengths and the maximum lengths of model SRS variations. If the maximum length of the desired LM rail exceeds them, jointed rails will be used. Contact THK for details. For the G dimension when a special length is required, we recommend selecting the corresponding G value from the table. The longer the G dimension is, the less stable the G area may become after installation, thus causing an adverse impact to accuracy.

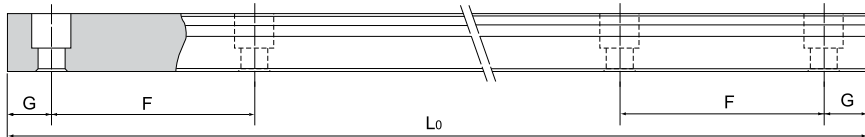


Table2 Standard Length and Maximum Length of the LM Rail for Model SRS

Unit: mm

Model No.	SRS 5	SRS 5W	SRS 7	SRS 7W	SRS 9	SRS 9W	SRS 12	SRS 12W	SRS 15	SRS 15W	SRS 20	SRS 25		
LM rail standard length (L ₀)	40	50	40	50	55	50	70	70	70	110	220	220		
	55	70	55	80	75	80	95	110	110	150	280	280		
	70	90	70	110	95	110	120	150	150	190	340	340		
	100	110	85	140	115	140	145	190	190	230	460	460		
	130	130	100	170	135	170	170	230	230	270	640	640		
	160	150	115	200	155	200	195	270	270	310	880	880		
				170	130	260	175	260	220	310	430	1000	1000	
						290	195	290	245	390	350	550		
							275	320	270	470	390	670		
									320	550	430	790		
									370		470			
	Standard pitch F	15	20	15	30	20	30	25	40	40	40	60	60	
G	5	5	5	10	7.5	10	10	15	15	15	20	20		
Max length	220	220	480	480	1240	1430	2000	2000	2000	2000	1800	1800		

Note1) The maximum length varies with accuracy grades. Contact THK for details.

Note2) If jointed rails are not allowed and a greater length than the maximum values above is required, contact THK.